

## Features

- Frequency range of 10 kHz to 400 MHz
- Fully compliant with DO-160/ MIL-STD-461
- “Air-core” inductors to prevent saturation
- Individual Calibration Included
- Three-Year Warranty



## Description

The LI-350 Line Impedance Stabilization Network (LISN) provides the necessary measurement platform for performing power line conducted emissions compliance testing as required by most worldwide standards for commercial products. The LI-350 is compliant with both RTCA DO-160 and MIL-STD-461.

The LISN provides defined stable impedance and isolates the EUT from power source influences, thereby providing accurate and repeatable results.

The LI-350 includes one pair of, separately housed, single-conductor networks, to be installed in series with each current-carrying conductor in a single-phase, dual-phase or DC power system. A second LI-350 pair can be used to accommodate 3-phase power systems (Wye or Delta configurations).

The LI-350 is equipped with Superior Electric SUPERCON® shrouded sockets at the mains (power input) and EUT (power output) ports. The matching color-coded plugs for connection to the mains and EUT wiring are included.


This LISN uses air-core inductors to prevent saturation and permeability variation. The mounting plate of the LI-350 is left unpainted in order to facilitate connection to earth ground in its installation, which is essential due to high leakage current.

## Calibration


All LI-350 LISNs are individually calibrated in compliance with the relevant requirements of RTCA DO-160 and MIL-STD-461. Impedance and Insertion Loss data is supplied with each unit, along with the calibration certificate.

## Typical Connection Diagrams

### Single Phase connection with one set of LISN

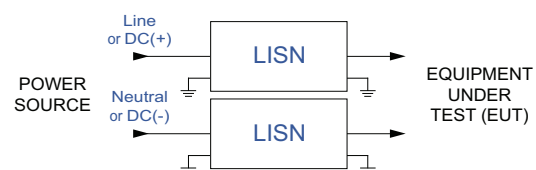

### Three Phase connection with two sets of LISNs

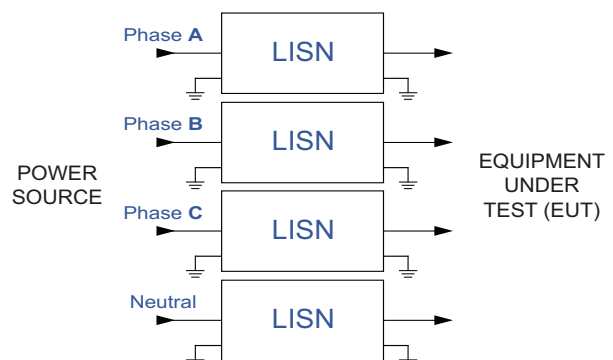


## Application

<b>Product Name</b>	Line Impedance Stabilization Network (LISN)
<b>Specification</b>	RTCA DO-160 / MIL-STD-461
<b>Application</b>	Power line conducted emissions tests
<b>Frequency Range</b>	10 kHz to 400 MHz
<b>RF Connector</b>	50Ω N-type (female)
<b>Current Rating</b>	50 Amperes
<b>AC Voltage Ratings</b>	480 VAC, 50-400 Hz 270 VAC, 800 Hz
<b>DC Voltage Rating</b>	600 VDC
<b>Inductors</b>	5 $\mu$ H (air-core)
<b>Mains &amp; EUT Connections</b>	Superior Electric <b>SUPERCON</b> ® shrouded sockets
<b>Dimensions (each network)</b>	15.4 x 7 x 6.6 inches / 39.1 x 17.7 x 16.7 cm

All specifications are subject to change without notice.  
All values are typical, unless specified.

## Impedance - DO-160 Limits

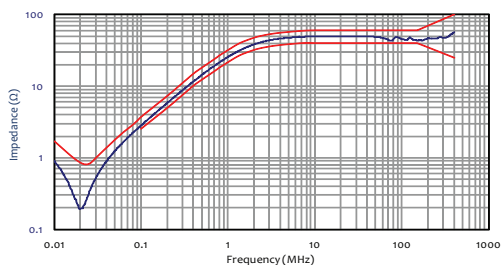

## Impedance - MIL-STD-461 Limits

