

## Features

- **Frequency Range**  
88 MHz to 108 MHz ( usable from 80 MHz to 120 MHz )
- **Transmit & Receive Capabilities**  
emissions/immunity applications
- **Individual Calibration Included**  
per SAE ARP 958 with NIST traceability
- **Three-year Standard Warranty**




## Description

The **ALFM-80120** is a linearly polarized Log Periodic Dipole Array (LPDA) Antenna, operating over the frequency range of 80 MHz to 120 MHz. This antenna is geared specifically for high power applications up to 2500 watts.

## Construction

The **ALFM-80120** is designed to be extremely durable, making it an ideal choice for daily use in laboratory environments, both indoors and outdoors, and even under continuous exposure to extreme weather conditions. The antenna is constructed using a heavy gauge, high grade, corrosion resistant aluminum.

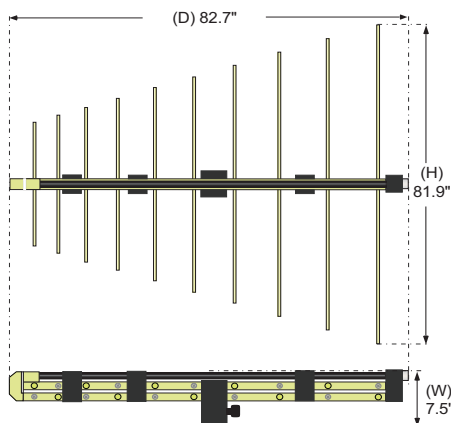

## Calibration

Each antenna is individually calibrated per SAE ARP 958 with NIST traceability. The calibration data and certificate is provided. Recognized ISO 17025 accredited calibration is also available upon request.

## Application

The **ALFM-80120** Power Log Periodic Antenna is primarily intended for use as a transmitting antenna for establishing radiated RF fields for product immunity tests, and is capable of handling power levels up to 2500 Watts.

The **ALFM-80120** is also suitable for use as an EMI test antenna for qualification-level regulatory compliance measurements (FCC, CE, RTCA DO-160, FDA, SAE Automotive, etc.).

Notwithstanding the above applications, the **ALFM-80120** can also be used for test site comparisons, shielding effectiveness tests of large enclosures, field monitoring, site surveys and other general purposes.

## Mounting

The mounting assembly for the the **ALFM-80120** incorporates a hinge mechanism to quickly and easily change the antenna polarization.

The assembly is equipped with a standard 1/4-inch x 20 mounting hole, which allows it to be affixed to Com-Power's **AT-812** Antenna Tripod, **AM-400** Antenna Mast, or any other similar structure with compatible mounting arrangements.

## Specifications

Product Name	Power Log Periodic Antenna
Frequency Range	88 MHz to 108 MHz (usable from 80 MHz to 120 MHz)
Polarization	Linear
Nominal Impedance	50Ω
Power Handling	2500 Watts (continuous)
Connector	7-16 DIN (female)
Antenna Factor	6 to 8 [dB(m <sup>-1</sup> )]
Isotropic Gain	1.5 to 5 dBi (@ 1 mtr)
VSWR	<1.3 (80 to 88 MHz) <1.25 (88 to 108 MHz) <1.45 (108 MHz to 120 MHz)
Dimensions (H x W x D)	7.5 x 81.9 x 82.7 Inches [19 x 208 x 210 cm]
Weight	13.5 lbs. [6.1 kg]

All specifications are subject to change without notice.  
All values are typical, unless specified.

## Accessories available from Com-Power:



PAM-103 Preamplifier



AT-812 Antenna Tripod



SPA-900TG Series Spectrum Analyzers


## Also Available:

AL-130R Active Loop Antenna


AM-741R Active Monopole Antenna

AB-900A/ABF-900A Biconical Antennas


## Typical Antenna Factors

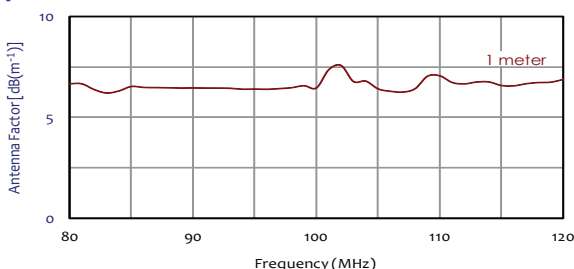


## Typical Isotropic Gain

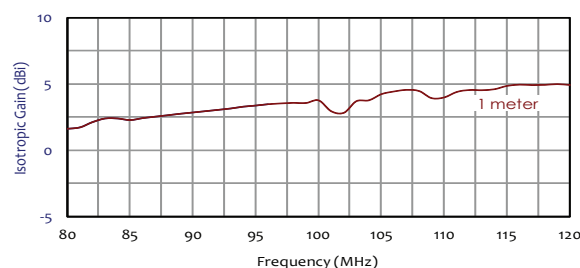


## Typical Voltage Standing Wave Ratio (VSWR)

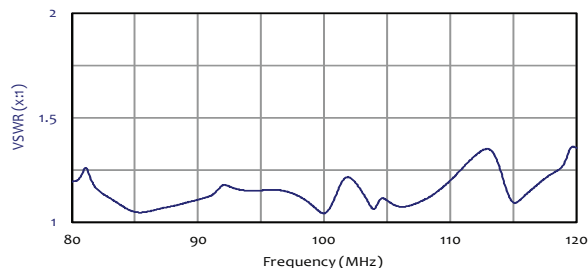

## Typical Return Loss

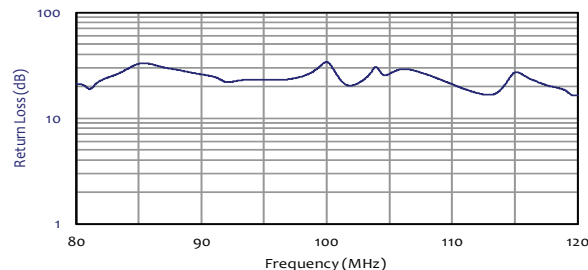

## Typical Field Strength @ 1 meter

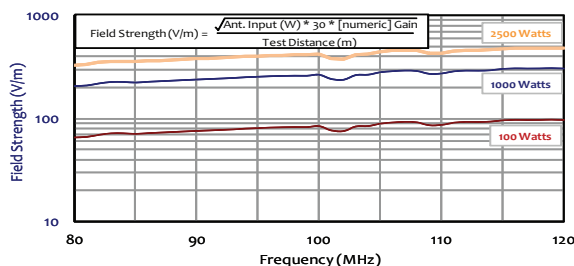

## Typical Forward Power Levels

